


MODEL SSCL



FOR THE EXACT REPLACEMENT
FOR THE:
RECTROAIRE Rc75
APPLIED COMFORT DMQ SERIES



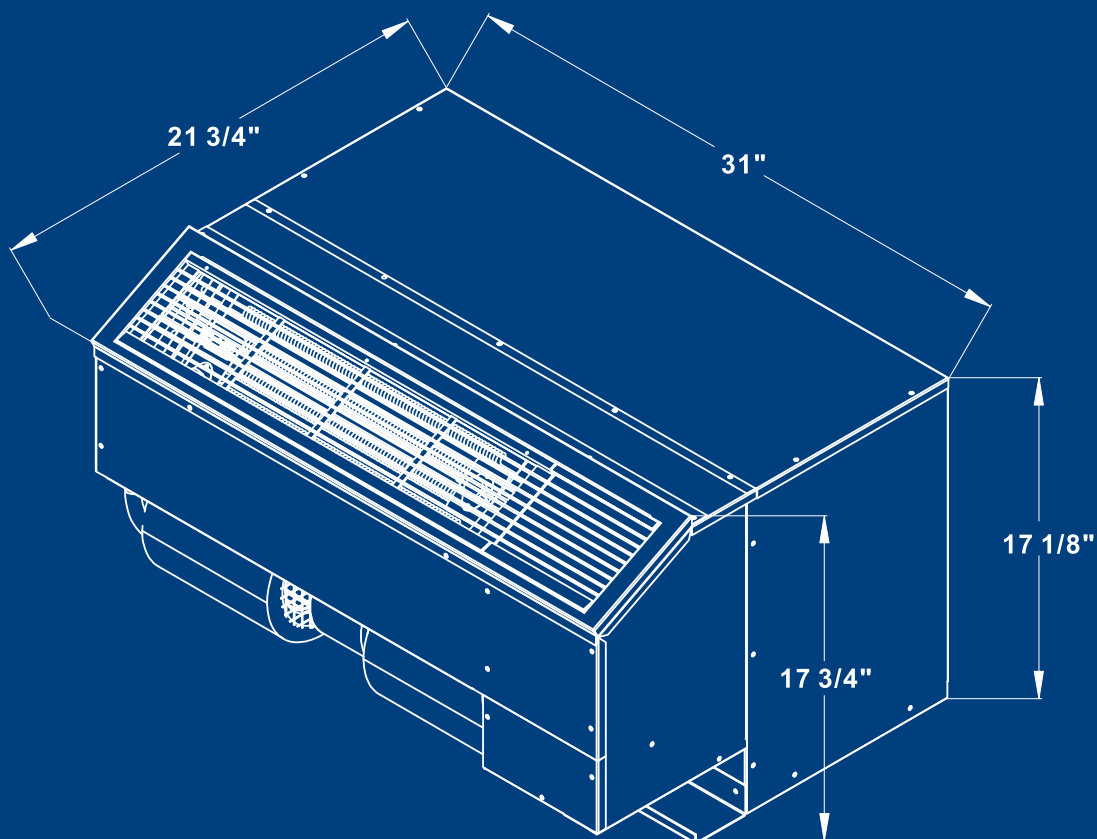

410A
REFRIGERANT



Line Voltage	Maximum Amperage	Wall Socket Configuration	Receptacle Number	Electrical Heat Options
115	16		NEMA5-20R	3.0-3.5
208/230	12		NEMA6-15R	3.0-3.5
208/230	16		NEMA6-20R	3.0-3.5
208/230	24		NEMA6-30R	3.0-3.5
270	16		NEMA7-20R	3.0-3.5

- ANALOG CONTROL AND MAIN THERMOSTAT (OPTIONAL)
PTC CERAMIC ELECTRIC HEAT OPTION AVAILABLE-CONSULT FACTORY

MODEL	SSCL509-TP	SSCL809-TP	SSCL513-TP	SSCL813-TP
COOLING CAPACITY (BTU/h)	9000	8900	11800	12000
HEATING CAPACITY (W)(OPTION)	3.2	3.2	3.2	3.2
HEATING CAPACITY HOT WATER (BTU/h)	16500/15100	16500/15100	16500/15100	16500/15100
VOLTAGE (V)	115V	208V	115V	208V
WATTS (W)	930	920	1320	1340
AIR FLOW (CFM)	350/280	350/280	340/265	340/265
AMPS (A)	8.1	4.4	11.5	6.4
EER	9.68	9.67	8.94	8.96
CHASSIS DIMENSIONS (in.)	31x 21 3/4x17 1/8	31x 21 3/4x17 1/8	31x 21 3/4x17 1/8	31x 21 3/4x17 1/8
SHIPPING BOX DIMENSION (in.)	36 5/8x25 7/8x20 1/2	36 5/8x25 7/8x20 1/2	36 5/8x25 7/8x20 1/2	36 5/8x25 7/8x20 1/2
WEIGHT (LBS)	150	150	154	154
LOADING (40'20')	168/126	168/126	168/126	168/126
HEATING CAPACITY STM (BTU/h)	18700/16500	18700/16500	18700/16500	18700/16500

- Important Note: Due to the ongoing development, the performance, specifications, components, and design is subject to change without notice. Please contact factory.
All chassis are Tested and Rated in Accordance with ARI 310/380 and UL Standard 484.
All "replacement" PTAC chassis are UL Listed for safety and ETL tested.